



WE CONTINUALLY DEMONSTRATE OUR COMMITMENT TO PERFORMANCE, PRODUCTIVITY AND DURABILITY.

**RIDE-ON 2+2 YEAR LIMITED WARRANTY\***

We know that each customer has different needs, and now we've got you covered with one simple warranty on all Snapper Pro® ride-on mowers, the 2+2 Year Limited Warranty. Snapper Pro ride-on mowers, including all zero-turn series, S800x and S75x models, are covered for 4 years (48 months) or 500 hours, whichever occurs first. During the first two-years (24 months), the mower is covered for unlimited hours. Belts, tires, brake pads, hoses, battery and blades are covered for 90 days. For engine warranty see engine operator's manual.

\*See your dealer for warranty details



[www.SnapperPro.com](http://www.SnapperPro.com)

Hydro-Gear® is a trademark of Hydro-Gear Inc., and is used under license  
Kawasaki® is a registered trademark of Kawasaki Motors Corporation  
Kohler® is a registered trademark of Kohler Company  
Marbain® is a registered trademark of The Fisher-Barton Group  
Viton® is a registered trademark of DuPont  
Yanmar™ is a trademark of Yanmar  
Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940  
Kawasaki: All power levels are stated gross horsepower at 3600 rpm per SAE J2723  
Kawasaki: All power levels are stated gross horsepower per SAE J2723  
Kohler and Yanmar: All power levels are provided by manufacturer  
Not all models available in California. Models subject to change without notice.

**BRIGGS&STRATTON PRODUCTS GROUP**  
MUNNSVILLE, NY 13409 USA  
800 933 6175  
©2014 ALL RIGHTS RESERVED  
PART # 1634\_SPP\_CAT\_0513

**WALK-BEHIND 2 YEAR LIMITED WARRANTY\***

Walk-behind mowers are covered for two-years (24 months) for unlimited hours. Belts, tires, brake pads, hoses, battery and blades are covered for 90 days. For engine warranty see engine operator's manual.



The FSC Logo identifies products which contain wood from well managed forests certified in accordance with the rules of the Forest Stewardship Council.

**GENUINE. PROFESSIONAL.**





## POWERFUL, PRACTICAL AND PRODUCTIVE.

Snapper Pro® mowers are where innovation meets common sense practicality to keep you mowing season after season. With powerful engine choices, heavy-duty components and technology, like the iCD™ Cutting System — Snapper Pro mowers are the smart choice for your landscaping needs.

iCD™ Cutting System .....	3
S800x .....	5
S200xt .....	7
S150xt .....	9
S125xt .....	11
S50xt .....	13
SW30 & SW20 .....	15
Collection Systems .....	17
Bagging Options .....	18
Accessories & Attachments .....	19
Selection Chart .....	20
Ride-On Specifications .....	21





# iCD™ CUTTING SYSTEM

## IT'S ALL ABOUT THE CUT

The iCD™ Cutting System was engineered to produce the best possible cut in a multitude of conditions. Every component works together to achieve superior cut quality. The baffle design and deep deck allow for better airflow and the extra wide opening allows for a more even and greater dispersal of clippings.



Striping kit standard on all iCD™ Cutting System decks.



We use a double layer of steel, the full width of our deck welded in opposing directions, for maximum strength.




0.25" thick Marbain® Steel Blades, designed for longer life, generate greater lift for a precision cut.



Cast-iron greaseable spindles for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly.



Cast-aluminum greaseable spindles feature 1" shaft with 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve.

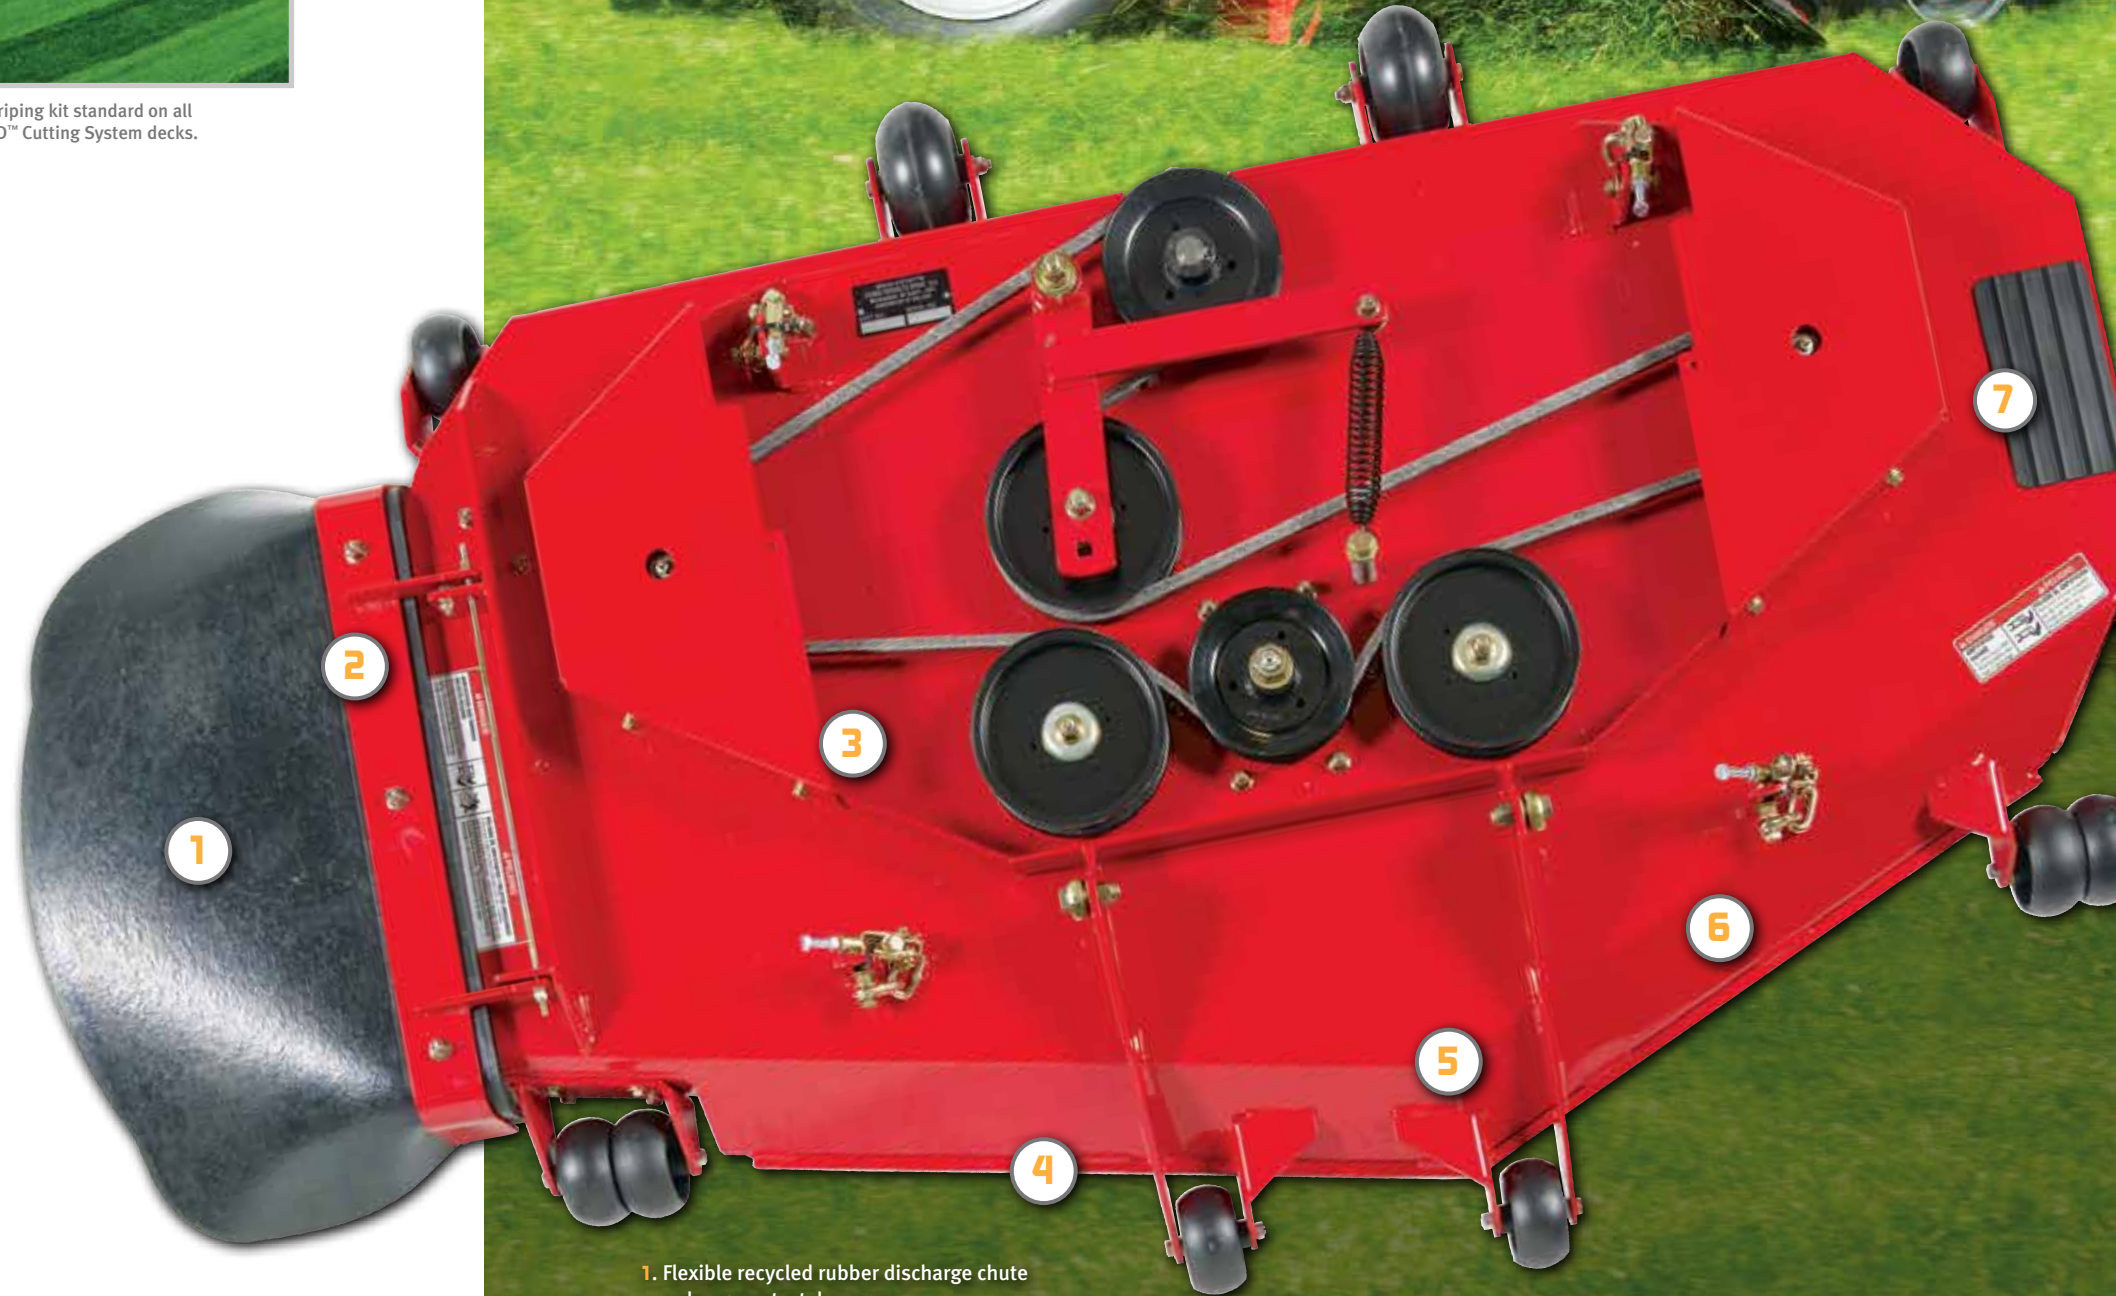

- 1. Flexible recycled rubber discharge chute reduces contact damage
- 2. Extra wide discharge opening evenly disperses grass clippings
- 3. Multi-layer heavy-gauge steel construction for maximum strength
- 4. Reinforced leading edge provides protection where the deck needs it most
- 5. Center point is offset, optimizing airflow for discharge
- 6. Slope nose design reduces the amount of clippings discharged from the front
- 7. Deck step allows for easy entry and exit from the operator's compartment



# S800X

## PROFESSIONAL



The S800x is the ideal machine for visibility and versatility. Its out-front design is perfect for trimming around trees, bushes and landscaped areas with ease. Be even more productive with a wide selection of accessory and attachment options.



Raise the deck with a flip-of-the-switch to make deck maintenance a snap.



Yanmar™ compact diesel engines are clean, quiet, fuel efficient, and reliable.



Optional 60" 2-stage snowblower and cab available.



The pivoting rear axle in conjunction with the floating front frame allows the S800x to follow the contours of the landscape for a precise, manicured finish.

MOWS UP TO  
**6 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

**MODEL**  
S800XY30D w/S800X/61  
S800XBV31 w/S800X/61  
S800XY30D w/S800X/72  
S800XBV31 w/S800X/72

**ENGINE**  
30 gross hp^ Yanmar™ Diesel  
31 gross hp^ Vanguard™  
30 gross hp^ Yanmar™ Diesel  
31 gross hp^ Vanguard™

**DECK**  
61"  
61"  
72"  
72"

# VISIBILITY & VERSATILITY

## ENGINE

- 31 gross hp^ Vanguard™ or 30 gross hp^ Yanmar™ diesel engine options
- Two-stage industrial air cleaner extends engine service life
- Easy access oil drain

## DRIVE SYSTEM

- Dual pumps and wheel motors
- 7" fans mounted on dual hydros
- Hydro fluid reservoir and hydro filter
- 5/8" hoses supply a constant flow of fluid cooling the hydro system
- Ground speed up to 10 mph

## MOWER DECK

- 72" or 61" cutting widths
- iCD™ Cutting System with striping kit
- Cast-iron greaseable spindles for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly
- Electric deck-lift makes for easy cut-height adjustment; cutting height ranges from 1.5" - 5" in 0.25" increments

## CHASSIS

- Heavy-duty C-channel, 7-gauge frame rails
- Premium adjustable seat with arm rests
- Flip-up seat

## FUEL SYSTEM

- Twin 6-gallon rugged, impact resistant fuel tanks with extra large filler necks
- Switch for fuel source (gasoline only)
- Top-mounted fuel pick-up with Viton® seals (diesel only)

## OPERATOR CONVENIENCE

- Ergonomic control panels with cup-holder and storage compartment
- Adjustable solid steel padded control arms

## ACCESSORIES

- Collection System (61"), Mulch Kit, Suspension Seat, Suspension Seat Insert, Flat-Free Caster Tires, Snowblower, Cab



\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
^ Power levels rated by engine manufacturer



# S200xt

## PROFESSIONAL



Vanguard™ BIG BLOCK™ engine provides increased horsepower and more torque.



Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles deliver unmatched power and durability.



The easy-to-use deck-lift takes the effort out of adjusting cut-height. Cutting height ranges from 1.5" - 6" in 0.25" increments.



Quick removal of the floor pan provides easy access to the top of the deck when maintenance is needed.

### ENGINE

- 36/28 gross hp\* Vanguard™ BIG BLOCK™, 29 gross hp^ Kohler® Command Pro EFI, 27 gross hp\* Briggs & Stratton Commercial Turf Series™, or 25.5 gross hp\*\* Kawasaki® FX801V engine options
- Advanced debris management system (Briggs & Stratton Commercial Turf Series™ models)
- Two-stage industrial air-cleaner (Vanguard™, Kohler® and Kawasaki® models)
- Easy access oil drain

### DRIVE SYSTEM

- Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles
- 7" cooling fans mounted on top of dual hydros
- Dual hydro fluid reservoirs and hydro filters
- Ground speed up to 10 mph

### MOWER DECK

- 72" or 61" cutting widths
- iCD™ Cutting System with striping kit
- Cast-iron greaseable spindles for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly
- Cut height: 1.5" – 6", adjust in 0.25" increments

### CHASSIS

- Heavy-duty 2" x 2" 7-gauge frame rails
- Premium adjustable seat with arm rests
- Flip-up seat
- Removable floor pan
- Five-bolt pattern wheels, 1/4" solid center wheels
- Flat-Free Caster Tires (10 gallon models)

### FUEL SYSTEM

- Twin 5-gallon rugged, impact resistant fuel tanks with switch for fuel source (Kawasaki®, Kohler®, and Vanguard™ models)
- Single 5-gallon rugged, impact resistant fuel tank (S200XTB2761)
- Extra large filler neck(s)
- Top-mounted fuel pick-up with Viton® seals

### OPERATOR CONVENIENCE

- Ergonomic control panels with cup-holder and storage compartment
- Adjustable solid steel padded control arms
- Pre-wired for simple installation of optional light kit

### ACCESSORIES

- Collection System (61"), Mulch Kit, Trailer Hitch Kit, Light Kit, Suspension Seat, Suspension Seat Insert, Flat-Free Caster Tires

# PRODUCTIVITY REDEFINED

The S200xt with premium components and the iCD™ Cutting System is a best-in-class commercial mid-mount zero-turn mower. With 61" and 72" cutting widths available and a 10 mph ground speed, the S200xt will get your big jobs done in no time.



MOWS UP TO  
**6 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

MODEL	ENGINE	DECK
S200XTKAV2661	25.5 gross hp** Kawasaki® FX801V	61"
S200XTB2761	27 gross hp* Briggs & Stratton Commercial Turf Series™	61"
S200XTBV2861	28 gross hp* Vanguard™ BIG BLOCK™	61"
S200XTKOH2961	29 gross hp^ Kohler® Command Pro EFI	61"
S200XTBV3661	36 gross hp* Vanguard™ BIG BLOCK™	61"
S200XTBV3672	36 gross hp* Vanguard™ BIG BLOCK™	72"

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
 \*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki  
 ^ Power levels rated by engine manufacturer

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
 \*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki  
 ^ Power levels rated by engine manufacturer



# S150xt

## PROFESSIONAL

This compact yet powerful performer is designed for the serious professional who demands the ultimate in performance and durability. Get in and out of your jobs fast with the S150xt.

### ENGINE

- 26 gross hp\* 810cc Vanguard™ V-Twin or 24 gross hp\*\* Kawasaki® FX730V engine options
- Two-stage industrial air-cleaner
- Easy access oil drain

### DRIVE SYSTEM

- Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles
- 7" fans mounted on top of dual hydros
- Dual hydro fluid reservoirs and hydro filters
- Ground speed up to 10 mph

### MOWER DECK

- 52" or 48" cutting widths
- iCD™ Cutting System with striping kit
- Cast-iron greaseable spindles (52"), Cast-aluminum greaseable spindles (48")
- Cut height: 1.5"- 5", adjusts in 0.25" increments

### CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Premium adjustable seat
- Flip-up seat
- Removable floor pan
- Five-bolt pattern wheels
- Flat-Free caster tires

### FUEL SYSTEM

- Twin 5-gallon rugged, impact resistant fuel tanks with switch for fuel source
- Extra large filler necks
- Top-mounted fuel pick-up with Viton® seals

### OPERATOR CONVENIENCE

- Ergonomic control panels with cup-holder and storage compartment
- Adjustable solid steel padded control arms
- Pre-wired for simple installation of optional light kit

### ACCESSORIES

- Collection System, Mulch Kit, Trailer Hitch Kit, Light Kit, Suspension Seat



Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles deliver unmatched power and durability.



Quick removal of the floor pan provides easy access to the top of the deck when maintenance is needed.



Vanguard™ 810cc engines deliver the optimum, power, performance, and efficiency commercial zero-turn mowers need.



Cast-iron greaseable spindles maximize usable life. (52" models)



# A POWERFUL CHOICE

MOWS UP TO  
**4.3 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

**MODEL**  
S150XTKAV2448  
S150XTBV2648  
S150XTKAV2452  
S150XTBV2652

**ENGINE**  
24 gross hp\*\* Kawasaki® FX730V  
26 gross hp\* 810cc Vanguard™ V-Twin  
24 gross hp\*\* Kawasaki® FX730V  
26 gross hp\* 810cc Vanguard™ V-Twin

**DECK**  
48"  
48"  
52"  
52"





# S125xt PROFESSIONAL

MOWS UP TO  
**5 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

MODEL	ENGINE	DECK
S125XTKAV2352	23 gross hp** Kawasaki® FS691V	52"
S125XTB2552	25 gross hp* Briggs & Stratton Commercial Turf Series™	52"
S125XTKAV2461	24 gross hp** Kawasaki® FS730V	61"
S125XTB2761	27 gross hp* Briggs & Stratton Commercial Turf Series™	61"

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
\*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

## VALUE & PERFORMANCE



The easy-to-use deck-lift takes the effort out of adjusting cut-height. Cutting height ranges from 1.5" - 5" in 0.25" increments.



Hydro-Gear® ZT-3400 commercial engineered drive system is designed for high performance and is fully serviceable.



Quick removal of the floor pan provides easy access to the top of the deck when maintenance is needed.



The Briggs & Stratton Commercial Turf Series™ engine features an Advanced Debris Management System which deflects dirt and debris from the engine, and any remaining debris is trapped in the high-capacity, dual-sealing air cleaner cartridge.

### ENGINE

- 27/25 gross hp\* Briggs & Stratton Commercial Turf Series™ or 24/23 gross hp\*\* Kawasaki® FS engine options
- Advanced debris management system (Briggs & Stratton Commercial Turf Series™ models)
- Easy-to-use oil drain

### DRIVE SYSTEM

- Dual, Hydro-Gear® Commercial ZT-3400 transaxles
- 7" cooling fans mounted on top of dual hydros
- Ground speed up to 10 mph

### MOWER DECK

- 61" or 52" cutting widths
- iCD™ Cutting System with striping kit
- Features greaseable cast aluminum spindles with 2.4" diameter ball bearings
- Cut height: 1.5" - 5", adjusts in 0.25" increments

### CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Removable floor pan
- Rugged, impact resistant 5.5-gallon fuel tank
- Adjustable contour seat with arm rests
- Flip-up seat

### OPERATOR CONVENIENCE

- Ergonomic control panels with cup-holder and storage compartment
- Adjustable solid steel padded control arms
- Control system provides smooth precise steering
- Pre-wired for simple installation of optional light kit

### ACCESSORIES

- Collection System, Mulch Kit, Trailer Hitch Kit, Light Kit, Premium Adjustable Seat, Flat-Free Caster Tires

With powerful engine choices, 52" or 61" iCD™ Cutting System options and speed up to 10 mph, the S125xt will cut your job down to size. The heavy-duty components, including the Hydro-Gear® Commercial ZT-3400 transaxles, will keep you mowing season after season.





# S50xt

## PROFESSIONAL



The compact, easy-to use S50xt is designed specifically for the daily rigors of commercial mowing. This mower may be small in size, but it's big on features.

# COMPACT & TOUGH

MOWS UP TO  
**3.2 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

MODEL	ENGINE	DECK
S50XTKAV1936	19 gross hp** Kawasaki® FX600V	36"
S50XTB2536	25 gross hp* Briggs & Stratton Commercial Turf Series™	36"
S50XTKAV1948	19 gross hp** Kawasaki® FX600V	48"
S50XTB2548	25 gross hp* Briggs & Stratton Commercial Turf Series™	48"

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
\*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

### ENGINE

- 25 gross hp\* Briggs & Stratton® Commercial Turf Series™ or 19 gross hp\*\* Kawasaki® FX600V engine options
- Advanced debris management system (Briggs & Stratton Commercial Turf Series models).
- Two-stage industrial remote air-cleaner (Kawasaki® models)
- Easy access oil drain

### DRIVE SYSTEM

- Dual Hydro-Gear® Commercial ZT-3100 transaxles
- 6" fans mounted on top of dual hydros
- Dual hydro fluid reservoirs and hydro filters
- Ground speed up to 8 mph

### MOWER DECK

- 48" or 36" cutting widths
- iCD™ Cutting System with striping kit on 48" models
- Fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge on 36" models
- Cast-aluminum spindles feature 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve
- .25" Marbain® blades
- Cut height: 1.5" - 4.5", adjusts in 0.25" increments

### CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Adjustable contour seat
- Flip-up seat
- Removable floor pan

### FUEL SYSTEM

- Twin 4-gallon rugged, impact resistant fuel tanks with switch for fuel source (S50XTKAV1936 & 48" models)
- Single 4-gallon rugged, impact resistant fuel tank (S50XTB2536)
- Extra large filler necks
- Top mounted fuel pick-up with Viton® seals

### OPERATOR CONVENIENCE

- Ergonomic control panels
- Adjustable solid steel padded control arms
- Pre-wired for simple installation of optional light kit

### ACCESSORIES

- Collection System (48"), Grass Catcher (36"), Mulch Kit, Trailer Hitch Kit, Light Kit, Arm Rests, Flat-Free Caster Tires, Striping Kit (36")

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
\*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki



The easy-to-use deck-lift takes the effort out of adjusting cut-height. Cutting height ranges from 1.5" - 4.5" in 0.25" increments.



Cast-aluminum spindle for longer usable life.



Quick removal of the floor pan provides easy access to the top of the deck when maintenance is needed.



Hydro-Gear® ZT-3100 drive system is designed for high performance and is fully serviceable.







## SW30 PROFESSIONAL

### ENGINE

- 23.5/20.5/19 gross hp\*\* Kawasaki® FX engine options
- Easy access oil drain

### DRIVE SYSTEM

- Dual Hydro-Gear® Commercial™ ZT-3100 transaxles
- 6" fans mounted on top of dual hydros
- Dual hydro fluid reservoirs and hydro filters
- Ground speed up to 6 mph

### MOWER DECK

- 61", 52", or 48" cutting widths
- Fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Cast-aluminum spindles feature 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve
- Cut height ranges variably using the quick-adjust crank
- Cut height: 1.5"- 5"

### CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Easy to access dump valves
- Flat-Free caster tires

### FUEL SYSTEM

- 5-gallon fuel tank
- Extra-large filler neck
- Top-mounted fuel pick-up with Viton® seals

### OPERATOR CONVENIENCE

- Cruise control bar
- Comfortable easy-to-use operator controls

### ACCESSORIES

- Grass Catcher (48, 52), Mulch Kit



## SW20 PROFESSIONAL

### ENGINE

- 15 gross hp\*\* Kawasaki® FS541V engine
- Easy access oil drain

### DRIVE SYSTEM

- Dual Hydro-Gear® Commercial™ ZT-3100 transaxles
- 6" fans mounted on top of dual hydros
- Dual hydro fluid reservoirs and hydro filters
- Ground speed up to 6 mph

### MOWER DECK

- 36" cutting width
- Fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Cast-aluminum spindles feature 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve
- Cut height ranges variably using the quick-adjust levers
- Cut height: 1.5"- 4.5"

### CHASSIS

- Heavy-duty 1" x 2" 11-gauge frame rails
- Easy to access dump valves
- Flat-Free caster tires

### FUEL SYSTEM

- 5-gallon fuel tank
- Extra-large filler neck
- Top-mounted fuel pick-up with Viton® seals

### OPERATOR CONVENIENCE

- Cruise control bar
- Comfortable easy-to-use operator controls

### ACCESSORIES

- Grass Catcher, Mulch Kit

### SW30

MOWS UP TO  
**3 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

### MODEL

SW30KAV1948  
SW30KAV1952  
SW30KAV2152  
SW30KAV2461

### ENGINE

19 gross hp\*\* Kawasaki® FX600V (manual start)  
19 gross hp\*\* Kawasaki® FX600V (manual start)  
20.5 gross hp\*\* Kawasaki® FX651V (electric start)  
23.5 gross hp\*\* Kawasaki® FX730V (electric start)

### DECK

48"  
52"  
52"  
61"

### SW20

MOWS UP TO  
**1.8 ACRES/HOUR**  
BASED ON 80% EFFICIENCY

SW20KAV1536

15 gross hp\*\* Kawasaki® FS541V (manual start)

36"

\*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

# SMOOTH OPERATORS

Snapper Pro's walk behind mowers will keep you mowing even under the most demanding conditions. These rugged walk-behind mowers are sure to handle the rigors of daily professional use.



Quick-adjust crank allows for variable cut height. (SW30 model only)



Dual hydro fluid reservoirs protect each hydro system from cross contamination.



Self-contained dual hydro transmissions are individually fan cooled and filtered.



Set your speed with the cruise control bar. Change direction quickly from left to right with the hand controls. Pull the handles up completely for reverse.



# COLLECTION SYSTEMS

## TURBO-PRO™ COLLECTION SYSTEM

The TURBO-Pro™ system vacuums the lawn for a clean finish in a wide variety of conditions. The system is highly resistant to clogging. The TURBO-Pro utilizes oversized drive and idler pulleys combined with a long drive belt for cool running and maximum belt life. The curved blade impeller reduces impeller speed and noise while maximizing air velocity. This Commercial-grade system mounts to the deck with a fabricated heavy-duty steel plate. The blower housing is protected with a 1" heavy-gauge tubular bumper. No tools are required after the unit has been installed to switch from bagging to non-bagging. The TURBO-Pro is a light-weight blower assembly and is ideal for use with compact models.



S125xt with TURBO-Pro and a triple bag collection system.  
TURBO-Pro Blower — Length: 31" Height: 16.5" Width 19"



Heavy-duty oversized drive and idler pulleys combined with a long drive belt allow for cool running and maximum belt life.



Curved steel blade impeller reduces impeller speed and noise.

## FAST-VAC® COLLECTION SYSTEM

This FAST-Vac® system is built around a super-tough, high-volume side panel air induction system that reduces clogging and produces significantly more air volume than conventional systems. The rugged impeller, built using industrial grade bearings, generates phenomenal airflow. Its spindle-driven vertical turbo is narrower, allowing you to get in and out of tight places. No tools are required after the unit has been installed to switch from bagging to non-bagging.



S200xt with FAST-Vac and a triple bag collection system.  
FAST-Vac Blower — Length: 36.8" Height: 20.2" Width 15.2"







Commercial-grade idlers and pulleys drive the vertical, spindle-drive turbo resulting in a very narrow profile.



Extremely rugged impeller rides on industrial-grade bearings to generate a phenomenal airflow.

# BAGGING OPTIONS

S800X S200xt S150xt S125xt S50xt

BAGGING SYSTEMS						
	<b>DOUBLE BAG</b> The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 9 cubic feet			TURBO-PRO™ 48/52" Deck	TURBO-PRO™ 52" Deck	TURBO-PRO™ 48" Deck
	<b>TRIPLE BAG</b> The triple bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 12.5 cubic feet		FAST-VAC® 61" Deck	TURBO-PRO™ 52" Deck  FAST-VAC® 52" Deck	TURBO-PRO™ 52"/61" Deck	
	<b>EZ DUMP</b> The EZ Dump™ increases productivity by giving the operator the ability to release clippings from their seat with the use of a toggle switch. The low profile of this system is better for visibility when compared to competitive systems. Capacity: 12.5 cubic feet		FAST-VAC® 61" Deck	TURBO-PRO™ 52" Deck  FAST-VAC® 52" Deck	TURBO-PRO™ 61" Deck	
	<b>EZ DUMP XL</b> The EZ Dump XL™ Collection System is ideal for larger jobs. Simply squeeze the handle and pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped each time for increased productivity. Capacity: 14 cubic feet	FAST-VAC® 61" Deck	FAST-VAC® 61" Deck			





# ACCESSORIES & ATTACHMENTS

**S800X S200xt S150xt S125xt S50xt SW30 SW20**

ACCESSORIES	S800X	S200xt	S150xt	S125xt	S50xt	SW30	SW20
Grass Catcher					●*	●**	●
Mulch Kit	●	●	●	●	●	●	●
Trailer Hitch Kit		●	●	●	●		
Light Kit		●	●	●	●		
Arm Rests					●		
Suspension Seat Insert	●	●					
Suspension Seat	●	●	●				
Premium Adjustable Seat				●			
Flat-Free Caster Tire	●	●	●	●	●	●	●
Striping Kit					●*		
Snowblower/Cab	●						

\*Available on 36" deck only. \*\*Available on 48" and 52" deck only.



## GRASS CATCHER

A lightweight durable fabric bag with hard plastic bottom attaches quickly.



## MULCH KIT

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



## TRAILER HITCH KIT

Will accept a 1/2" shank ball and comes complete with hardware.



## LIGHT KIT

Models are pre-wired for simple installation.



## ARM RESTS

Add these foldable arm rests for increased riding comfort on S50xt.



## SUSPENSION SEAT INSERT

Add this to the premium adjustable seat for increased comfort.



## SUSPENSION SEAT

Suspension seat for optimal comfort.



## PREMIUM ADJUSTABLE SEAT

High quality seat with red trim for added comfort. Available for S125xt.



## FLAT-FREE CASTER TIRE

Run all day with no flats, eliminates downtime. Standard on select models.



## STRIPING KIT

Rubber flap system lays down grass to create patterns across the landscape. Standard on iCD™ Cutting System decks.



## SNOWBLOWER/CAB

60" 2-stage snowblower and cab available for S800x.

# SELECTION CHART

GROSS HP	MAKE	ENGINE	FUEL TYPE	CUTTING WIDTH				
				36"	48"	52"	61"	72"
15**	Kawasaki FS541V	Gasoline	SW20					
19**	Kawasaki FX600V	Gasoline	S50xt	SW30	SW30	SW30		
20.5**	Kawasaki FX651V	Gasoline				SW30		
23**	Kawasaki FS691V	Gasoline				S125xt		
24**	Kawasaki FX730V	Gasoline		S150xt	S150xt	S150xt	SW30	S125xt
25*	Briggs & Stratton Commercial Turf Series	Gasoline	S50xt	S50xt	S125xt			
25.5**	Kawasaki FX801V	Gasoline					S200xt	
26*	810cc Vanguard V-Twin	Gasoline		S150xt	S150xt			
27*	Briggs & Stratton Commercial Turf Series	Gasoline					S125xt	S200xt
28*	Vanguard BIG BLOCK	Gasoline					S200xt	
29^	Kohler Command PRO EFI	Gasoline					S200xt	
30^	Yanmar	Diesel					S800x	S800x
31*	Vanguard	Gasoline					S800x	S800x
36*	Vanguard BIG BLOCK	Gasoline					S200xt	S200xt

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
 \*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

^ Power levels rated by engine manufacturer





**MOWER SPECIFICATIONS**

**S800X**

**S200xt**

**S150xt**

**S125xt**

**S50xt**

**SW30**

**SW20**

<b>ENGINE</b>							
Make (Gross Horsepower)	Vanguard™ (31'), Yanmar™ Diesel (30')	Vanguard™ BIG BLOCK™ (36/28'), Kohler® Command Pro EFI (29'), Briggs & Stratton Commercial Turf™ (27'), Kawasaki® FX801V (25.5")	810cc Vanguard™ V-Twin (26'), Kawasaki® FX730V (24")	Briggs & Stratton® Commercial Turf Series™ (27/25'), Kawasaki® FS730V (24"), Kawasaki® FS691V (23")	Briggs & Stratton® Commercial Turf Series™ (25'), Kawasaki® FX600V (19")	Kawasaki® FX730V (23.5"), Kawasaki® FX651V (20.5"), Kawasaki® FX600V (19")	Kawasaki® FS541V (15")
PTO	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Cylinders	2, 3 (diesel)	2	2	2	2	2	2
Starting	Electric	Electric	Electric	Electric	Electric	Electric, Manual (Kawasaki® FX600V models)	Manual
Fuel Capacity (TOTAL)	12 gallons	10 gallons / 5 gallons (S200XTB2761)	10 gallons	5.5 gallons	8 gallons / 4 gallons (S50XTB2536)	5 gallons	5 gallons
<b>MOWER</b>							
Cutting Width (In.)	72, 61	72, 61	52, 48	61, 52	48, 36	61, 52, 48	36
Cutting Height (In.)	1.5 - 5	1.5 - 6	1.5 - 5	1.5 - 5.0	1.5 - 4.5	1.5 - 5	1.5 - 4.5
Deck Construction	iCD™ Cutting System with striping kit	iCD™ Cutting System with striping kit	iCD™ Cutting System with striping kit	iCD™ Cutting System with striping kit	iCD™ Cutting System with striping kit (48") / 10-Gauge Steel (36")	10-gauge, fabricated, double top deck, double reinforced side skirts, overlap welded corners	10-gauge, fabricated, double top deck, double reinforced side skirts, overlap welded corners
Spindles	Cast-iron, greaseable	Cast-iron, greaseable	Cast-iron, greaseable (52"), Cast-aluminum, greaseable (48")	Cast-aluminum, greaseable	Cast-aluminum, greaseable	Cast-aluminum, greaseable	Cast-aluminum, greaseable
Belts	Single B-section Kevlar™ corded belts	Single B-section Kevlar™ corded belts	Single B-section Kevlar™ corded belts	Single 5V-section Kevlar™ corded belts	Single B-section Kevlar™ corded belts	Single B-section Kevlar™ corded belts	Single B-section Kevlar™ corded belts
<b>CHASSIS</b>							
Frame Rail	C-channel, 7-gauge	2" x 2", 7-gauge	1.5" x 2", 11-gauge	1.5" x 2", 11-gauge	1.5" x 2", 11-gauge	1.5" x 2", 11-gauge	1" x 2", 11-gauge
Bearings	Greaseable tapered caster spindle and tapered wheel bearings			Greaseable tapered caster spindle and tapered wheel bearings			
Finish	Automotive quality powder coat paint with U.V. protection			Automotive quality powder coat paint with U.V. protection			
<b>DRIVE TRAIN</b>							
Transmission	Dual pumps and wheel motors with 7" mounted cooling fans	Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles with 7" mounted cooling fans	Dual Hydro-Gear® Commercial ZT-5400 Powertrain® transaxles with 7" mounted cooling fans	Dual Hydro-Gear® ZT-3400 transaxles with 7" mounted cooling fans	Dual Hydro-Gear® ZT-3100 transaxles with 6" mounted cooling fans	Dual Hydro-Gear® ZT-3100 transaxles with 6" mounted cooling fans	Dual Hydro-Gear® ZT-3100 transaxles with 6" mounted cooling fans
Drive Axles	1.25" Tapered	1.375" Tapered	1.375" Tapered	1.25" Tapered	1" Tapered	1" Tapered	1" Tapered
Drive Tires (in.)	24 x 12-12	24 x 12-12	23 x 10.5-12 (52"), 23 x 9.5-12 (48")	22 x 11 x 10	20 x 10-10 (48"), 20 x 7-10 (36")	20 x 8-10	18 x 6.5-8
Caster Tires (in.)	13 x 6.5 (rear), 11 x 4 (front)	13 x 6-6.5 (Flat-Free on 10 gal. models)	13 x 6.5-6 Flat-Free	13 x 5-6	11 x 4-5	11 x 4.5 Flat-Free	9 x 3.5 Flat-Free
<b>GROUND SPEED</b>							
Speeds-fwd. (mph)	0-10	0-10	0-10	0-10	0-8	0-6	0-6
Speeds-rev. (mph)	0-5	0-5	0-5	0-5	0-4	0-3	0-3
<b>DIMENSIONS</b>							
Overall Length	115.5"	79"	78"	81"	69"	82.5" (61"), 81" (52"), 80" (48")	72"
Overall Width : deflector down / up	88" / 74" (72"), 73" / 61.5" (61")	88" / 74" (72"), 76" / 63" (61")	68" / 54" (52"), 64" / 50" (48")	77" / 63.5" (61"), 67.5" / 54.5" (52")	64" / 49" (48"), 52" / 37" (36")	77"/62" (61"), 67.25"/53" (52"), 61.5"/48"(48")	51.5"/36.5"
Dry Weight (lbs.)	1677 (72"), 1514 (61")	1288 (72"), 1171 (61")	1141 (52"), 1107 (48")	1113 (61"), 1059 (52")	724 (48"), 688 (36")	800 (61"), 675 (52"), 754 (48")	550
<b>OPERATOR CONTROL &amp; COMFORT SYSTEMS</b>							
Seat Package	Premium adjustable seat	Premium adjustable seat	Premium adjustable seat	Contour seat with arm rests	Contour seat	N/A	N/A
Certified ROPS with retractable seatbelt	Standard, 90° Foldable	Standard, 90° Foldable	Standard, 180° Foldable	Standard, 180° Foldable	N/A	N/A	N/A
Instrumentation	Hour meter	Hour meter, Fuel level gauge	Hour meter, Fuel level gauge	Hour meter, Fuel gauge	Hour meter, Fuel level gauge	N/A	N/A
Controls/Safety Group	Seat actuated engine kill, blade, clutch safety switch, parking brake, safety circuit	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit	Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit	Operator presence/ foot-activated neutral	Operator presence/ foot-activated neutral
Parking Brake	Disk type	Internal transaxle	Internal transaxle	Internal transaxle	Internal transaxle	Internal transaxle	Internal transaxle
Accessories	Collection System (61"), Mulch Kit, Suspension Seat, Suspension Seat Insert, Flat-Free Caster Tires, Snowblower, Cab	Collection System (61"), Mulch Kit, Trailer Hitch Kit, Light Kit, Suspension Seat, Suspension Seat Insert, Flat-Free Caster Tires (standard on 10 gal. models)	Collection System, Mulch Kit, Trailer Hitch Kit, Light Kit, Suspension Seat	Collection System, Mulch Kit, Trailer Hitch Kit, Light Kit, Premium Adjustable Seat Upgrade, Flat-Free Caster Tires	Collection System (48"), Grass Catcher (36"), Mulch Kit, Trailer Hitch Kit, Light Kit, Arm Rests, Flat-Free Caster Tires, Striping Kit (36")	Grass Catcher (52", 48"), Mulch Kit	Grass Catcher, Mulch Kit
<b>WARRANTY</b>							
Engine	2-Year Limited Manufacturer's Warranty (Yanmar), 3-Year Limited Manufacturer's Warranty (Vanguard)	3-Year Limited Manufacturer's Warranty	3-Year Limited Manufacturer's Warranty	3-Year Limited Manufacturer's Warranty	3-Year Limited Manufacturer's Warranty	3-Year Limited Manufacturer's Warranty	3-Year Limited Manufacturer's Warranty
Balance of Machine	4-Year Limited Warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, Tires, Brake Pads, Battery, Blades: 90 days†			4-Year Limited Warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, Tires, Brake Pads, Battery, Blades: 90 days†		2-Year Limited Warranty commercial use, front-to-rear, parts & labor. Belts, Tires, Brake Pads, Battery, Blades: 90 days†	

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
 \*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

^ Power levels rated by engine manufacturer  
 † See dealer for details.

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton  
 \*\* All power levels are stated gross horsepower at 3600 rpm per SAE J2723 as rated by Kawasaki

^ Power levels rated by engine manufacturer  
 † See dealer for details.